


Item #	Ref #	Description
1	1	AV cabinet to be above head of bed in #3 room, with the cabinet built at 14.5" tall to duplicate a projector cabinet for future use.
2	1	Rear bath vanity cabinet to have all drawers in line of doors below sink. Reference coach 1749 for bathroom layout. At center drawer stack, add 2 120V A/C outlets at back of middle drawer for hair tool storage and use.
3	1	Add broom closet between refrigerator and washer/dryer. Closet to have 1 full height door with open space for broom/mop storage. Add roof above, exact height TBD. Door to have trim that matches refrigerator. Add 120V A/C outlets inside lower section at back wall.
4	1	At rear bath upper cabinet above vanity add wall mount faucets. Delete puck lights, and move outlets inside the upper cabinet. Add single grab bar on outside of cabinet directly in front of the bathroom. Cabinet to be built deeper and/or sink need adjust closer to sink wall to allow for faucets to land at center of sink. See Details for details.
5	1	Add overhead cabinet in #1 slide over restrooms for projector and storage.
6	1	#2 cabinet to be built out as follows: had closet to have upper storage, with lower section pull out clothes hamper. All closet to be upper and lower doors with full hanging space. Lower #2 section to be a large equal size drawers.
7	1	Add 3 towel bars above rear bath above commode, with upper closet above with mirror doors.
8	1	Add cabinet behind restrooms #2 room and above #1 rest. Cabinet to have full section upper storage with taller top, and folded dividers with view on end to wedge between restrooms. All sections to be 2" deep. Add 2 120V A/C outlets stacked on top of each other between restrooms.
9	1	Add edge of panels at left bedroom walls, Qty. 2 total.
10	1	Rear bath head closet to have 2 drawers below, with 1 adjustable shelves behind a door on top.
11	1	Co-Pilot seat to be Queen size.
12	1	Delete upper cabinet above vanity in half bath. Add hanging mirror on half bath wall.
13	1	Highstands next to bed to have lower highstands only with drawers.
14	200.0	Delete window in mid entry door.
15	301.1	Add electric latches to refrigerator door and drawers.
16	301.1	Cover lower refrigerator panel in laminate to match refrigerator. Reference coach 1753.
17	301.1	Refrigerator to be pushed back against sink wall. Pocket behind door closed to be used for wires, vent, and refrigerator footings/anchors.
18	314.2	Special microwave - GE Cafe Series, matte black, CVM15793D1. Handle to be brushed black.
19	317.0/318.0	Install Hinged fridge bath cooler in lower front bay facing left in lieu of chest freezer.
20	400.0	Add cabinet above entry door to be storage with adjustable shelves/wall with 1" open glass space below for pictures in lieu of glass cabinet. Reference coach 1759.
21	400.0	Premium tie at entry side walls.
22	400.0	Premium tie at rear side walls.
23	401.1/401.2	Head pocket door to be framed with metal insert. Left side to clear mirror. All pocket door to have head and left side clear mirror.
24	402.0	Premium laminate a cabinet of coach. See Interior sheet.
25	402.0	Premium quartz material at galley backsplash. Premium tie at rear bath and half bath backsplash, and half bath leather top.
26	403.0	Premium Ultra leather to be used at cab seating, sofa, dinette, restrooms, vanity, see interior sheet for details.
27	403.0	Premium wall materials at wallpaper, and wall systems.
28	403.0	Add recessed lighting to bedroom in addition to same. Bedroom Qty. 3, cabin Qty. 4.
29	403.0	Rearward two storage bays to feature powered trays, bay of entry door to be manual. Forward storage bay to have one very bay for grill cabinet.
30	403.0	Add illumination tray controls at bay doors on both bath and aft storage bays at both point and in-line side of coach.
31	403.0	Add additional light strip behind vanity, reference coach 1742.
32	400.0	Add recessed lighting to all window sills.
33	400.0	Add recessed light strip on back of upper galley, back of rear bath vanity cabinet, cabinet above commode in both rear and half bath. Remove puck lights under each cabinet except the galley.
34	400.0	Counter recessed lighting to be at galley, entry cabinet, half bath, restrooms, #3 bath, and rear bath.
35	400.0	Toe kick accent lighting at galley, half bath, bed room trim pad, and rear bath.
36	400.0	Add rear bath saddle, make top taller to meet bottom from falling out.
37	400.0	Add matte black robe hooks to shower glass feet of door. Shower glass hardware to be matte black.
38	400.0	Add custom speakers to front dash area like coach 1785.
39	400.0	Remove sound ceiling speakers per Anthony Galles A/Dina SE in lieu of standard. Color match to ceiling.
40	400.0	Add a projection TV system as an entertainment. To be Custom UHDTV in addition to standard LED TV overhead. Requires custom production system in place of standard window sunscreen cassette of projector. Add 3 bluetooth speakers and bluetooth transmitter to allow for outside viewing of projector. Surround sound system to be arranged around projection. Bluelay player to be included. Add note for details.
41	400.0	Add 55" OLED TV with cabinet in #2 bedroom to be deeper to accommodate storage behind TV. TV to be open with powered arm similar to 1717.
42	400.0	Add recessed lighting to bedroom in addition to same. Bedroom Qty. 3, cabin Qty. 4.
43	400.0	Add AppleTV at salon, bedroom, and belly TV Qty. 3.
44	400.0	Add iPad to aft side of bed.
45	400.0	Add Curt Spectrum Trailer Brake Controller 53120.
46	400.0	Add rear locker covers that is covered in material to be mounted next to safe sides. See Note for details.
47	400.0	Osman to be David style.
48	400.0	Add 120V A/C outlet at head of #4, outlet to be directly above bearing top.
49	400.0	Delete window awnings per wire for future use.
50	400.0	Add additional clearances to allow for plumbing area and the face of the sidemaster seats.
51	400.0	Add additional clearance lights to duplicate 1738 layout. 5 additional across the top, and 4 additional across the lower section on the same panel.
52	400.0	All equipment with ethernet capability to be hardwired to coach IP network, with extra cat 6 cable to every possible location.
53	400.0	All available marker and clearance lights to be clear lens.
54	400.0	Add 3 camera monitor screens above driver, seat in lieu of the 1 standard.
55	400.0	17Vageer CVM1555 camera roof mounted for viewing low limits and obstructions. Mount one at center of coach facing forward, and one at left and right aft. All will be trailer camera heads in lieu of a new monitor. Reference government of 1722 coach.
56	400.0	Delete cab drapes, add cover for driver's seatbelt.
57	400.0	Add 120V A/C outlet inside cabinet above toilet in half bath.

CHECK CHANGE ORDERS

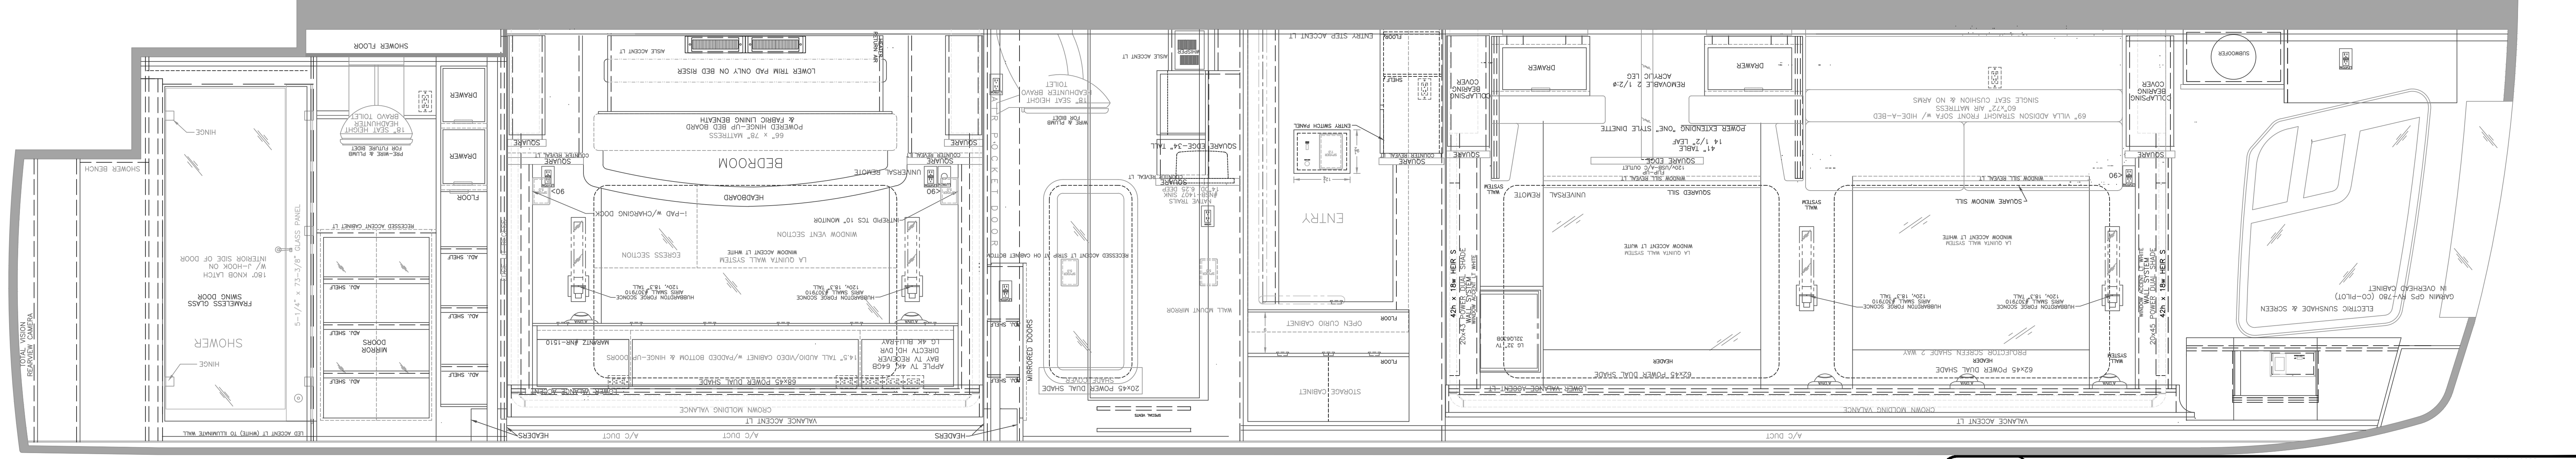

CUSTOMER APPROVAL

SPECIAL OPTIONS AND DETAILS:

- INVERTED 120V OUTLET
- 120V/USB CHARGING
- ASLE LIGHT
- DIAMETER SWITCH
- LED LIGHT
- SPICER SWITCH
- EXTERIOR LIGHT
- SMALL LED LT.

CHANGES & MODIFICATIONS:

CHASSIS DWG 10/10/22
SKIN DWG 10/26/22
ELECTRICAL DWG 11/14/22
FLOORPLAN 11/28/22
ELEVATION 11/30/22
FINAL DWG 01/06/23

SCHEDULED START DATE: 10/31/22
SCHEDULED TO LEAVE CABINET: 03/06/23
ESTIMATED COMPLETION: 04/04/23

BY: Richard J. [Signature]
DATE: 07/27/22
REVISION: 03/15/23
SCALE: 1"=1'
MODEL: P50

ENGINEERING COORDINATOR: NATHAN KELLY
302" WHEELBASE

1782